




Acüsta

FIRST NAME IN SEALING SYSTEMS

Bottom of Door seal - Mortised / Concealed BDS-C09-W & BDS-C09-NW

Installation Location: To a single or double hinged door bottom

Mechanism: The seal is concealed at the door bottom and operates automatically by pressure against the hinge side of the door frame on its adjusting screw. Seal gaps between 3mm-15mm

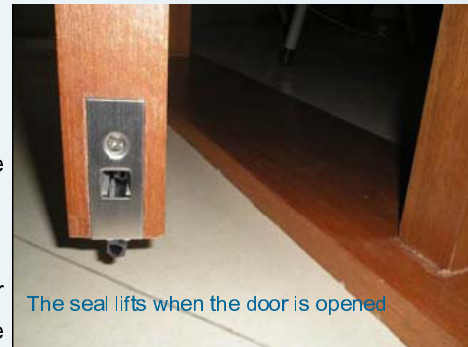

Standard Length: 910mm (different lengths available on request)

Installation steps:

1. mortise a groove of 35mm x 16mm at the door bottom
2. measure the door width & cut the seal to the designed length
3. make sure the soft part of the seal is towards the ground & that the brass-adjusting screw on the door hinge side. Insert the seal into the rebate & affix to the door with the fixings provided.
4. rotate the adjusting stick until closing door pushes the seal down to make contact with the ground or threshold

Caution: DO NOT put too much pressure on the seal as it may damage by excess pressure!



Sealing material: PVC/EPDM/PILE WEATHERSTRIPPING




Adjusting screw on the hinge side
of the door



BDS-C09-W

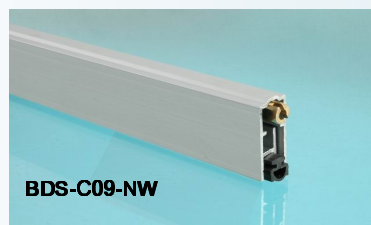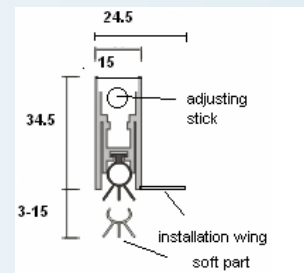

BDS-C09-NW

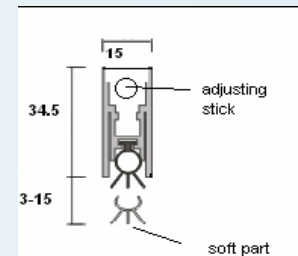

 **Cylax** Limited 兆利創建有限公司

Unit 1303, 13/F., Cheong Tai Building 287-289 Reclamation Street, Kowloon, Hong

Kong 香港九龍新填地街287-289號昌泰大廈13樓1303室

Tel: 852 3105 9933 Fax: 852 3007 4895

Email: info@cylaxltd.com

<http://www.cylaxltd.com> & <http://www.alibaba.com/member/cylax/product.html>



Acüsta

FIRST NAME IN SEALING SYSTEMS

Bottom of Doorseal - Surface mounted / Face mounted BDS-FO2-P & BDS-FO2-B

Installation Location: Single or double hinged door bottom

Face mounted, easy and simple installation, suitable for DIY installation.

Seals gaps between: 3mm - 15mm

Standard length: 910mm / different lengths are available


Installation steps:

1. measure the door width & cut the seal to the desired length
2. fix the seal on the door bottom with the screws


Sealing material options:

PVC or EPDM

Face treatment: Bronze or Zinc White Plating

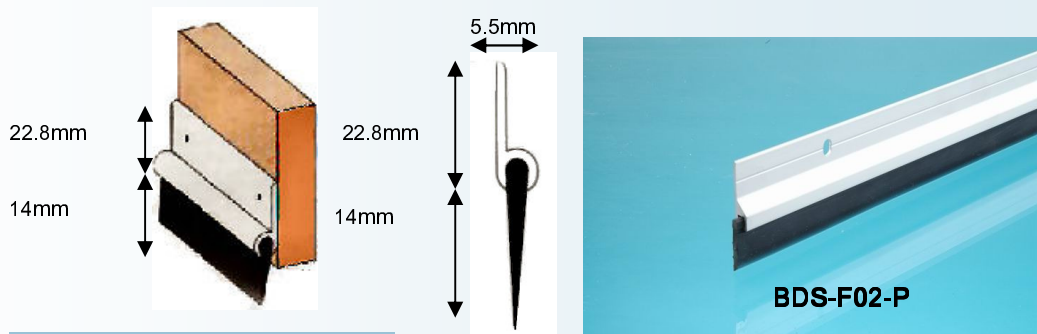

Nylon Brushstrip

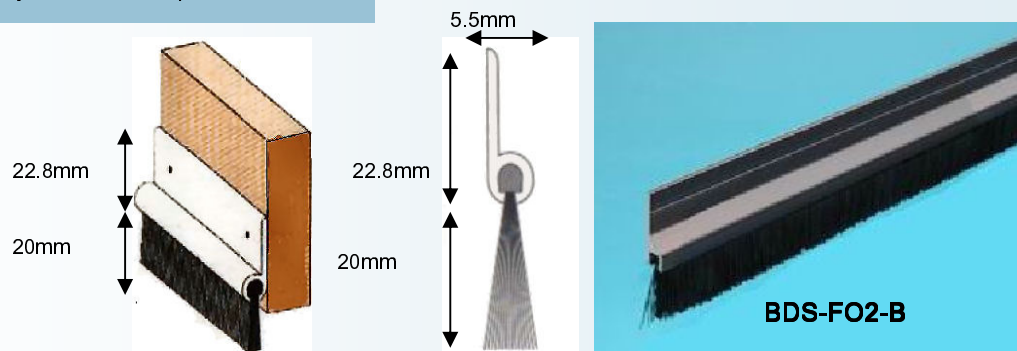

 **Cylax** Limited 兆利創建有限公司

Unit 1303, 13/F., Cheong Tai Building 287-289 Reclamation Street, Kowloon, Hong

Kong 香港九龍新填地街287-289號昌泰大廈13樓1303室

Tel: 852 3105 9933 Fax: 852 3007 4895

Email: info@cylaxltd.com

<http://www.cylaxltd.com> & <http://www.alibaba.com/member/cylax/product.html>